




21UV Series
VOGUE UNIVERSAL 12
Floor Ceiling Indoor Unit

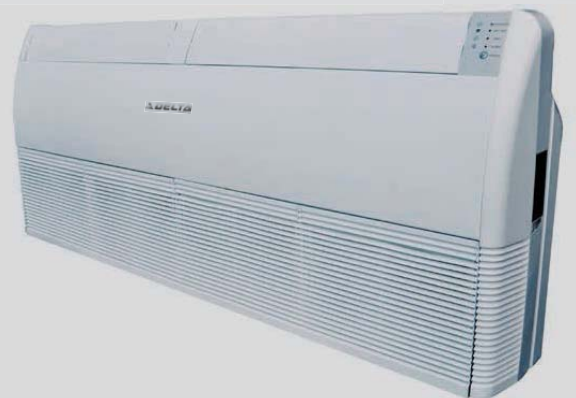

SPECIFICATIONS | 60Hz

21UV Series Vouge Universal 12
Floor Ceiling Indoor Unit
R22 & R410A Split System Cooling
Cooling Nominal : 24,000 - 60,000 Btuh (7.0- 17.5 kW)

INDOOR UNIT FEATURES

- ✓ 24 Volt Control Circuit
- ✓ Quiet Centrifugal Blower
- ✓ Painted Decorative Cabinet
- ✓ Accurator / Piston Refrigerant Control
- ✓ Clenable Cartridge Filters
- ✓ AUTO SWING (Vertical)
- ✓ EASY CONNECT Flare Connection

Notes:

1. Nominal capacities are based on ARI standards 210 / 240 - 89, air entering the indoor coil for cooling at 80/67 ° F (27/19 ° C) , DB/WB indoor & 95 ° F (35 ° C) ambient temperature operating at high fan speed for 220-240 volt, 60 Hz operation.
2. Ratings are based on indoor and outdoor units connected by 16 ft (5 m) of tubing.
3. Refrigerant metering device is installed in the indoor unit as standard.
4. Flare fittings are provided for connecting indoor.
5. Insulation of suction line is required.
6. Outdoor units are shipped with full operating charge.
7. For details of model number nomenclature, please refer to publication DCTNOM-50314

PHYSICAL DATA						
MODEL NO.	21UV		024C	036C	048C	060C
			24-070BWA	24-105BWA	24-140BWA	24-175BWA
Cooling Capacity Nominal		Btuh (kW)	24,000 (7.0)	36,000 (10.5)	48,000 (14.0)	60,000 (17.5)
Refrigerant Control			Accurator / Piston type @ Indoor unit			
I N D O O R	Type		Centrifugal			
	Speed		3	3	3	3
	Motor	HP	1/3	1/3	1/2	1/2
	Air Flow (H)	CFM (m³/hr)	890 (1500)	890 (1500)	1360 (2300)	1360 (2300)
	Noise Level (Hi)	dBA	50	50	57	57
E L E C T R I C A L	Voltage		208-230/1/60			
	Range		min 187 - max 253			
	FLA		1.09	1.09	1.45	1.45
Controls			Wireless Microprocessor LCD Remote Control			
Refrigerant Type			R22/R410A			
R E F R I G E R A N T	Type		Flare			
	Liquid		3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)
	Suction		5/8 (15.9)	5/8 (15.9)	3/4 (19.1)	3/4 (19.1)
Drain Connections inches (mm)			1 (25)			
D I M E N S I O N S	Height		9 3/4 (240)	9 3/4 (240)	9 3/4 (240)	9 3/4 (240)
	Width		49 (1245)	49 (1245)	65 3/4 (1670)	65 3/4 (1670)
	Depth		26 3/4 (680)	26 3/4 (680)	26 3/4 (680)	26 3/4 (680)
Net Weight lbs (kgs)			73 (33)	77 (35)	104 (47)	104 (47)



DELTA Comfort Technologies LLC.
 3350 SW 48th Ave, Miramar, Florida.33027. USA
 Tel: 954 734 2708 Fax: 954 874 6999
www.deltacomforttechnologies.com
www.delta-dct.com

DCT Interamerica: Latin America-Mexico
info@dctinteramerica.com

DCT America: North America, Canada
info@dctamerica.com

DCT Europe: Europe, M.East, Africa
info@dcteu.com

DCT China: Asia, Pacific, Russia
info@dctchina.com

